

Submersible Pressure Sensor Type ABS MD 127

Features:

- Dry ceramic sensor
- Accuracy $\leq 0.2\%$
- Cable according Bg V V-1.12.96 specifications





Technical specifications

Description	
Material	
Cable	PE, shielded
Housing	Stainless steel 1.4404
Sensor	Ceramic Al_2O_3 , gold coated
Output signal	4...20 mA, 2-wire, fixed to the sensors measuring range
Accuracy	$\leq \pm 0.2\%$ FS @ 25 °C
Response time	200 ms
Supply voltage	9...30 V DC
Ambient temperature	-25...80 °C
Temperature coeff.	$\leq \pm 0.02\%$ FS/K (Zero)
Long tem stability	$\leq \pm 0.2\%$ FS p.a.
Protection	IP 68
Weight of sensor	approx. 0.5 kg
Weight of cable	0.5 kg / 10 m
Electrical connection shielded	PE cable with pressure compensation capillary and filter

Measuring Range	Max. Overpressure	Cable Length
0 - 1.0 mH ₂ O	4 bar	10 m
0 - 2.0 mH ₂ O	6 bar	10 m
0 - 2.0 mH ₂ O	6 bar	25 m
0 - 4.0 mH ₂ O	6 bar	10 m
0 - 4.0 mH ₂ O	6 bar	25 m
0 - 10 mH ₂ O	10 bar	15 m
0 - 10 mH ₂ O	10 bar	25 m
0 - 20 mH ₂ O	18 bar	25 m
0 - 40 mH ₂ O	25 bar	45 m

Dimensions (mm)

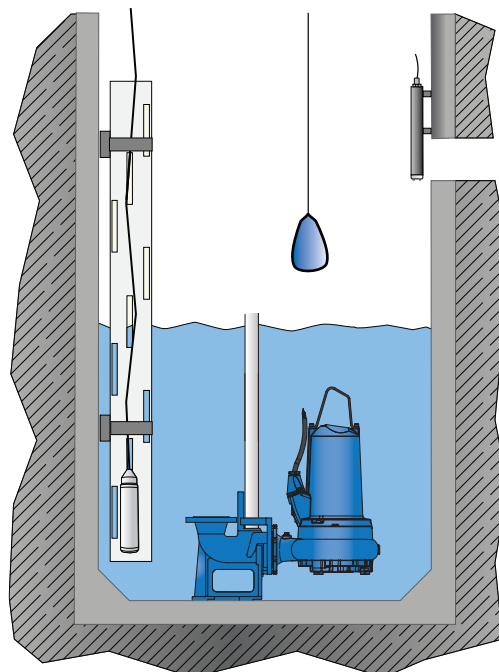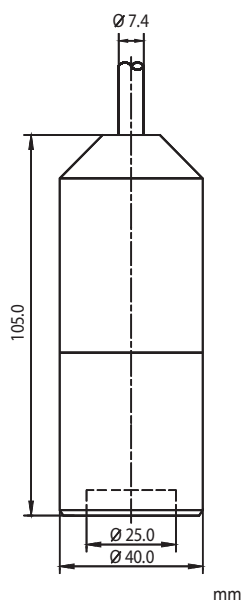

Mounting pressure sensor MD 127

In pits or tanks without turbulence the sensor can be mounted hanging freely in its cable.

If there is a strong turbulence we recommend that the sensor is protected inside a pipe, with a diameter of at least 50 mm, which is mounted vertical alongside the tank or pit wall.


CE

MD 127 conform with the following Council Directives and Generic standards:

Safety: EN61010-1:2010
EMC: EN61326-1:2006

Electrical connections

4...20 mA 2-wire



U = 9...30V DC

Also available in EX version ABS-P133.
EX version: 12...30V DC

Load diagram

Supply-voltage VDC

