

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com



	Page
- SPECIFICATIONS	200
SELECTION CHART	201
PERFORMANCE CHART AGA 0.60	202
PERFORMANCE CHART AGA 0.75	203
PERFORMANCE CHART AGA 1.00	204
PERFORMANCE CHART AGA 1.50	205
PERFORMANCE CHART AGA 2.00	206
PERFORMANCE CHART AGA 3.00	207
PERFORMANCE CHART AGC 1.50	208
PERFORMANCE CHART AGC 2.00	209
PERFORMANCE CHART AGC 3.00	210
- CONSTRUCTIONS	300
SECTIONAL VIEW	300
MECHANICAL SEAL	301
MECHANICAL SEAL	302
DIAGRAM AND ELECTRIC CONNECTIONS	303
DIAGRAM AND ELECTRIC CONNECTIONS	304
- DIMENSIONS	400
PACKING AND WEIGHT	401
- TECHNICAL DATA	500

CENTRIFUGAL PUMPS

AGA-AGC

SPECIFICATIONS

50Hz

PUMP		
Liquid Handled	Type of liquid	Clean water
	Max temperature [°C]	45
Maximum working pressure	[MPa]	0.6 (AGA 0.60-0.75-1.00)
		1.0 (AGA 1.50-2.00-3.00; all AGC)
Maximum suction depth	[m]	8
Construction	Impeller	Closed centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	G 1" (AGA 0.60-0.75-1.00) UNI ISO 228 G 1½" (AGA 1.50-2.00-3.00 ; all AGC) UNI ISO 228
	Discharge	G 1" UNI ISO 228
Material	Casing	Cast iron
	Impeller	PPO mod. glass fibre reinforced (AGA 0.60-0.75-1.00)
		Brass (AGA 1.50-2.00-3.00 all AGC)
	Shaft seal	Ceramic/Carbon/NBR
	Casing cover	AISI 304 (AGA 0.60-0.75-1.00)
		None (AGA 1.50-2.00-3.00 all AGC)
	Shaft	AISI 416 (AGA 0.60-0.75-1.00)
		AISI 303 (wet extension AGA 1.50-2.00-3.00 all AGC)
Bracket	Cast iron (AGA 1.50-2.00-3.00 all AGC)	
	Aluminium (AGA 0.60-0.75-1.00)	
Ejector	PPO mod. glass fibre reinforced	
Diffuser	PPO mod. glass fibre reinforced	
Applicable standard of test		ISO 9906 – Annex A


MOTOR		
Type	Electric - TEFC	
	Single Phase	Three Phase
No. of Poles	2	
Synchronous speed [min ⁻¹]	3000	
Insulation Class	F	
Protection degree	IP 44	
Power rating	[kW]	0.44÷1.5
	[HP]	0.6÷1.5
Frequency [Hz]	50 Hz	
Voltage [V]	230 ±10%	230/400 ±10%
Capacitor	Built in	-
Over load protection	Built in	Provided by the user
Casing material	Aluminium	
Base material/motor support	Plastic foot /Cast iron	
Dimensions of cable entry	PG11 - PG13.5 (see dimensions page 400)	

CENTRIFUGAL PUMPS

AGA-AGC

SELECTION CHART

50Hz

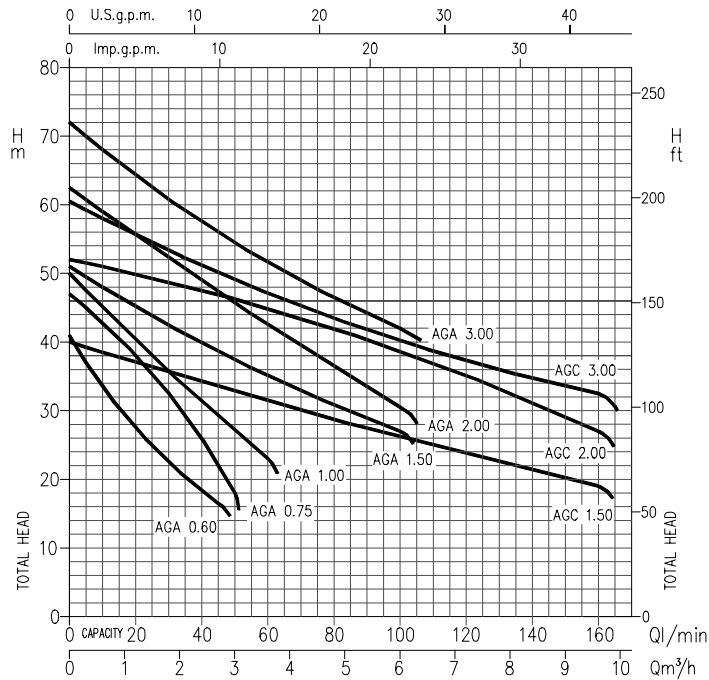

Type pumps		kW	HP	Q=Capacity												
Single Phase 230 V 50 Hz	Three Phase 230/400 V 50 Hz			l/min 5 m³/h 0.3	10 0.6	20 1.2	30 1.8	45 2.7	50 3.0	60 3.6	80 4.8	100 6	130 7.8	160 9.6		
H=Total manometric head in meters																
AGA 0.60 M	AGA 0.60 T	0.44	0.6	37	33.4	27.1	22	16.5	-	-	-	-	-	-		
AGA 0.75 M	AGA 0.75 T	0.55	0.75	45	42.8	37.9	32	21.9	18	-	-	-	-	-		
AGA 1.00 M	AGA 1.00 T	0.75	1	47.5	45	40.3	35.7	29.1	27	23	-	-	-	-		
AGA 1.50 M	AGA 1.50 T	1.1	1.5	-	48	45.1	42.4	38.6	37.4	35.1	30.8	27	-	-		
AGA 2.00 M	AGA 2.00 T	1.5	2	-	59	55.6	52.2	47.3	45.7	42.5	36.4	30.5	-	-		
-	AGA 3.00 T	2.2	3	-	68	64.3	60.8	55.9	54.4	51.6	46.4	42	-	-		
AGC 1.50 M	AGC 1.50 T	1.1	1.5	-	38.5	37	35.6	33.5	32.7	31.4	28.7	26.1	22.4	19		
AGC 2.00 M	AGC 2.00 T	1.5	2	-	51	49.9	48.8	46.9	46.3	44.9	42	38.7	33.2	27		
-	AGC 3.00 T	2.2	3	-	58	55.6	53.3	50.1	49.1	47.1	43.4	40.2	35.9	32.5		

TYPE KEY:



Voltage **M** Single phase
T Three phase

HP CODE
0.60
0.75
1.00
1.50
2.00
3.00

Type model **AGA**
AGC


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGA 0.60 (0.45 kW)
 SYNCHRONOUS SPEED : 3000 min⁻¹

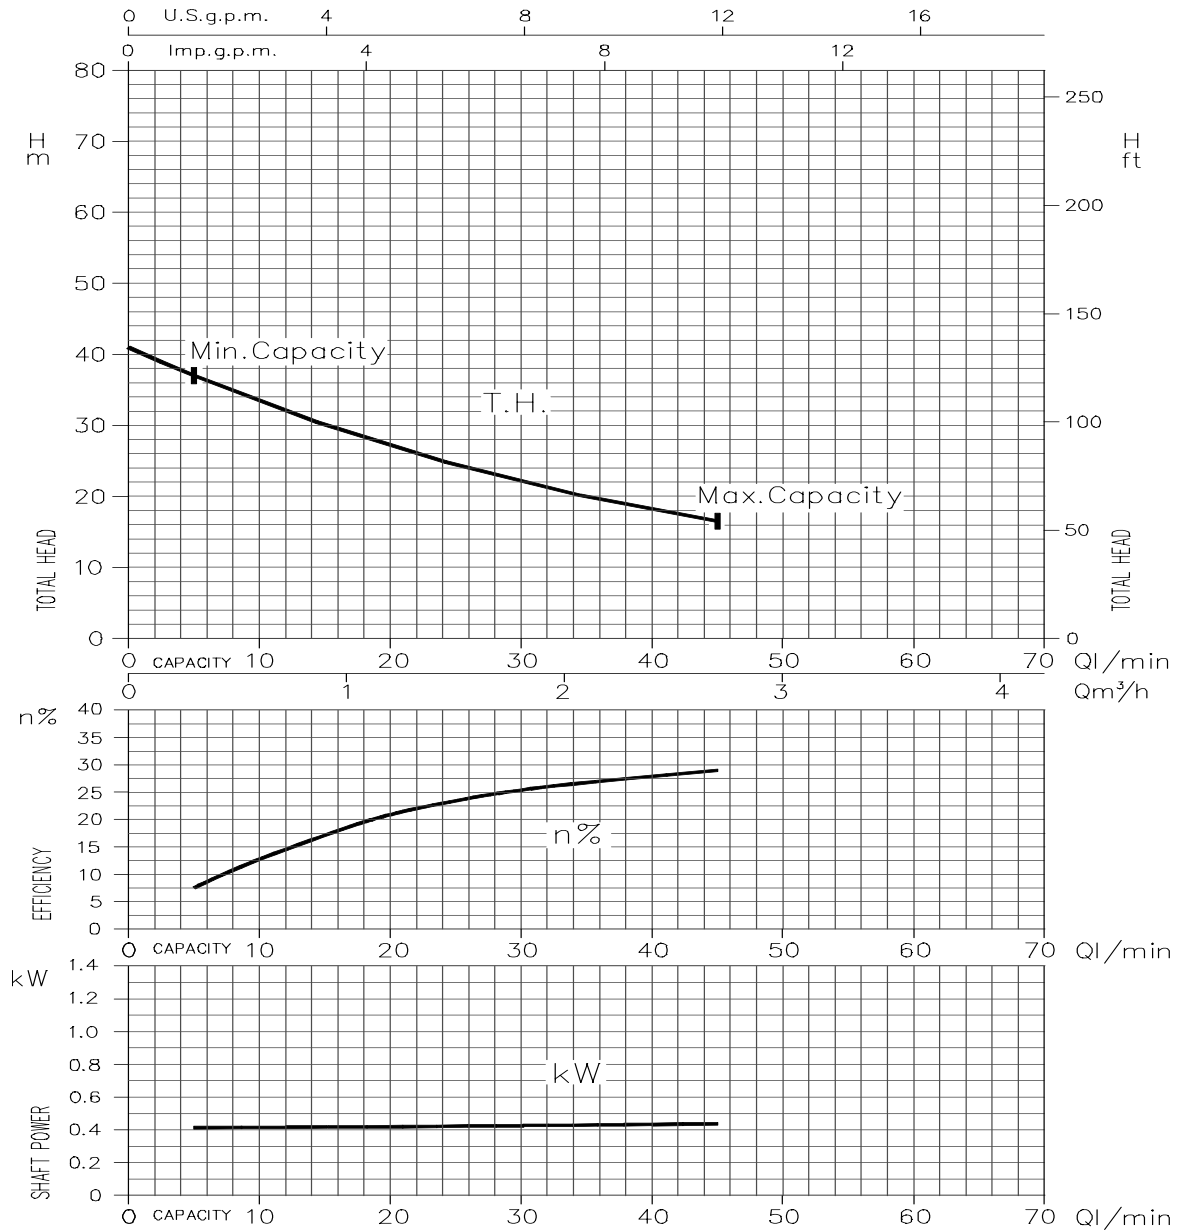

Temperature of water: 20°C
 Impeller diameter = 130 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

**AGA 0.75 (0.55 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹**

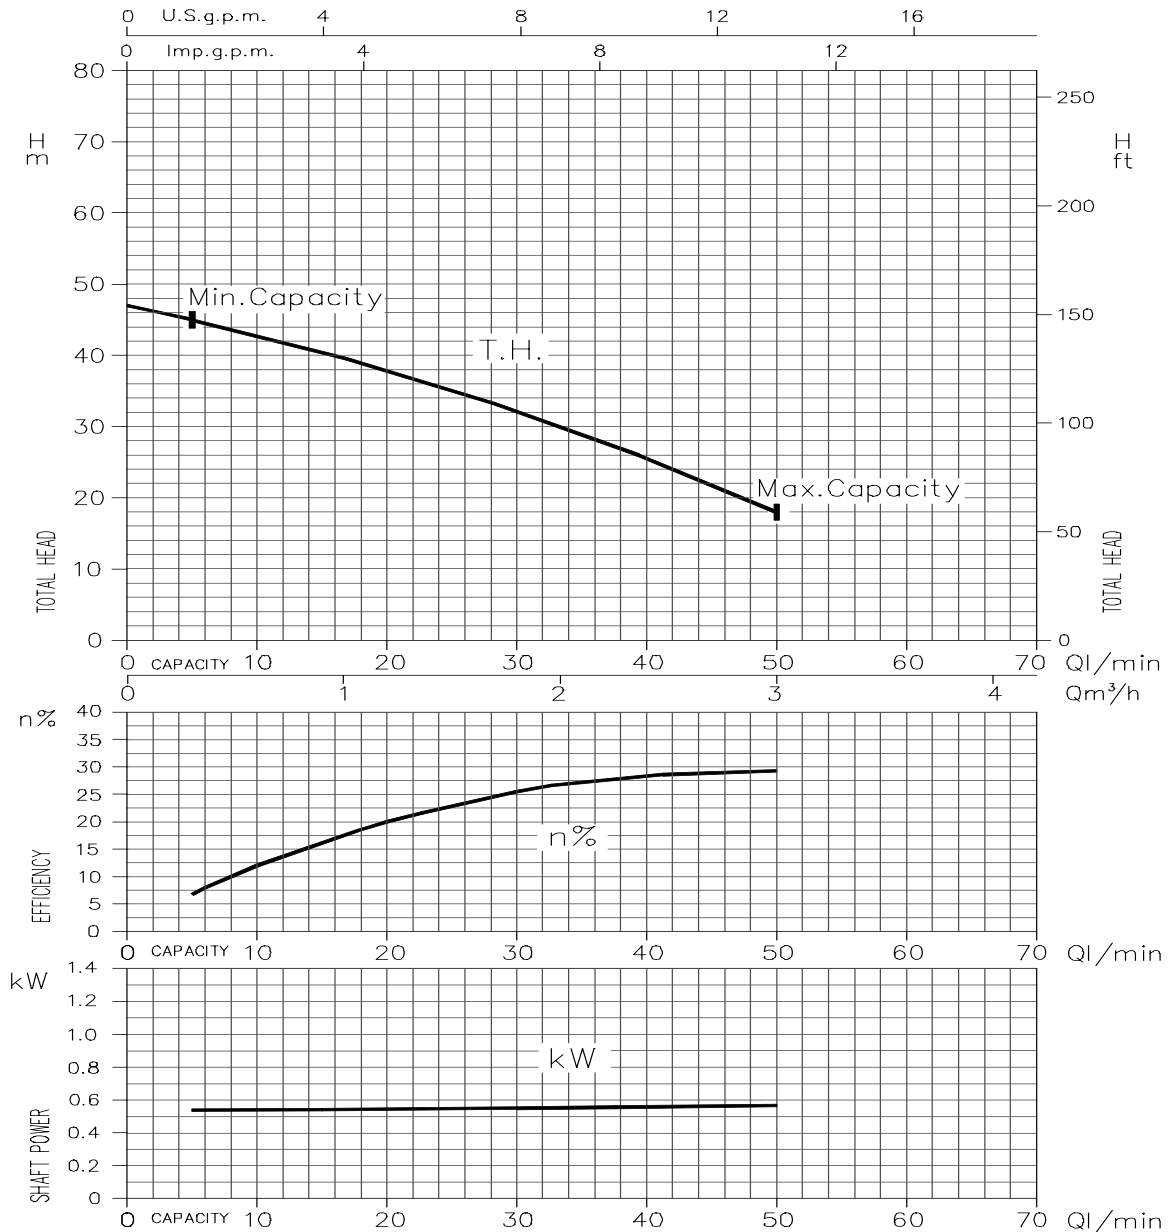

Temperature of water: 20°C
 Impeller diameter = 130 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

**AGA 1.00 (0.75 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹**

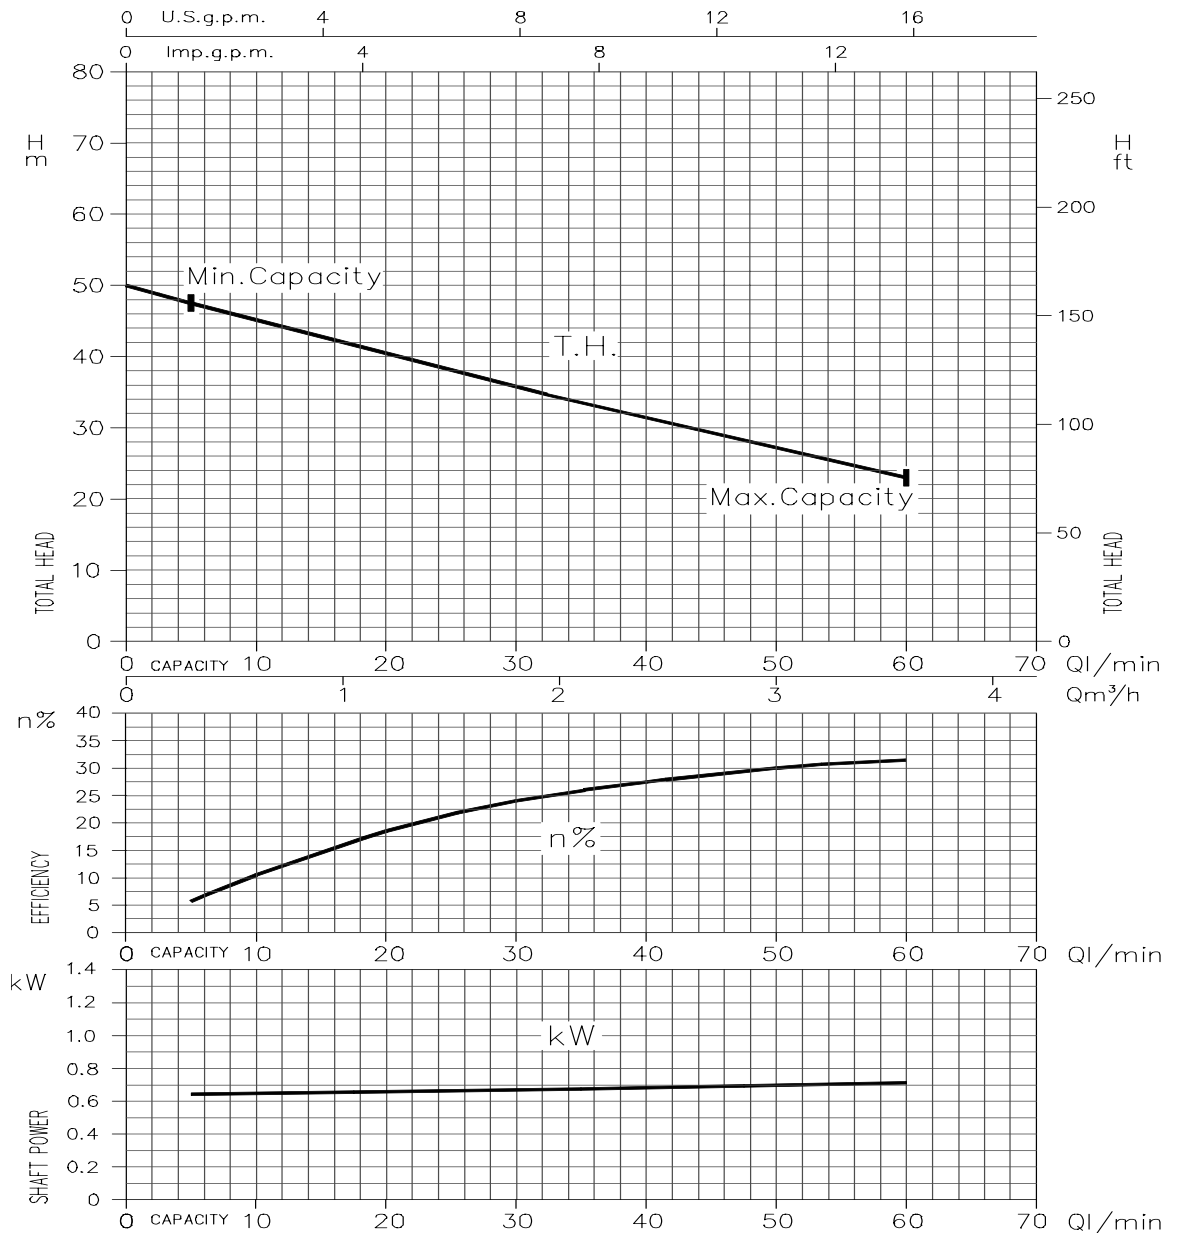

Temperature of water: 20°C
 Impeller diameter = 130 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGA 1.50 (1.1 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹

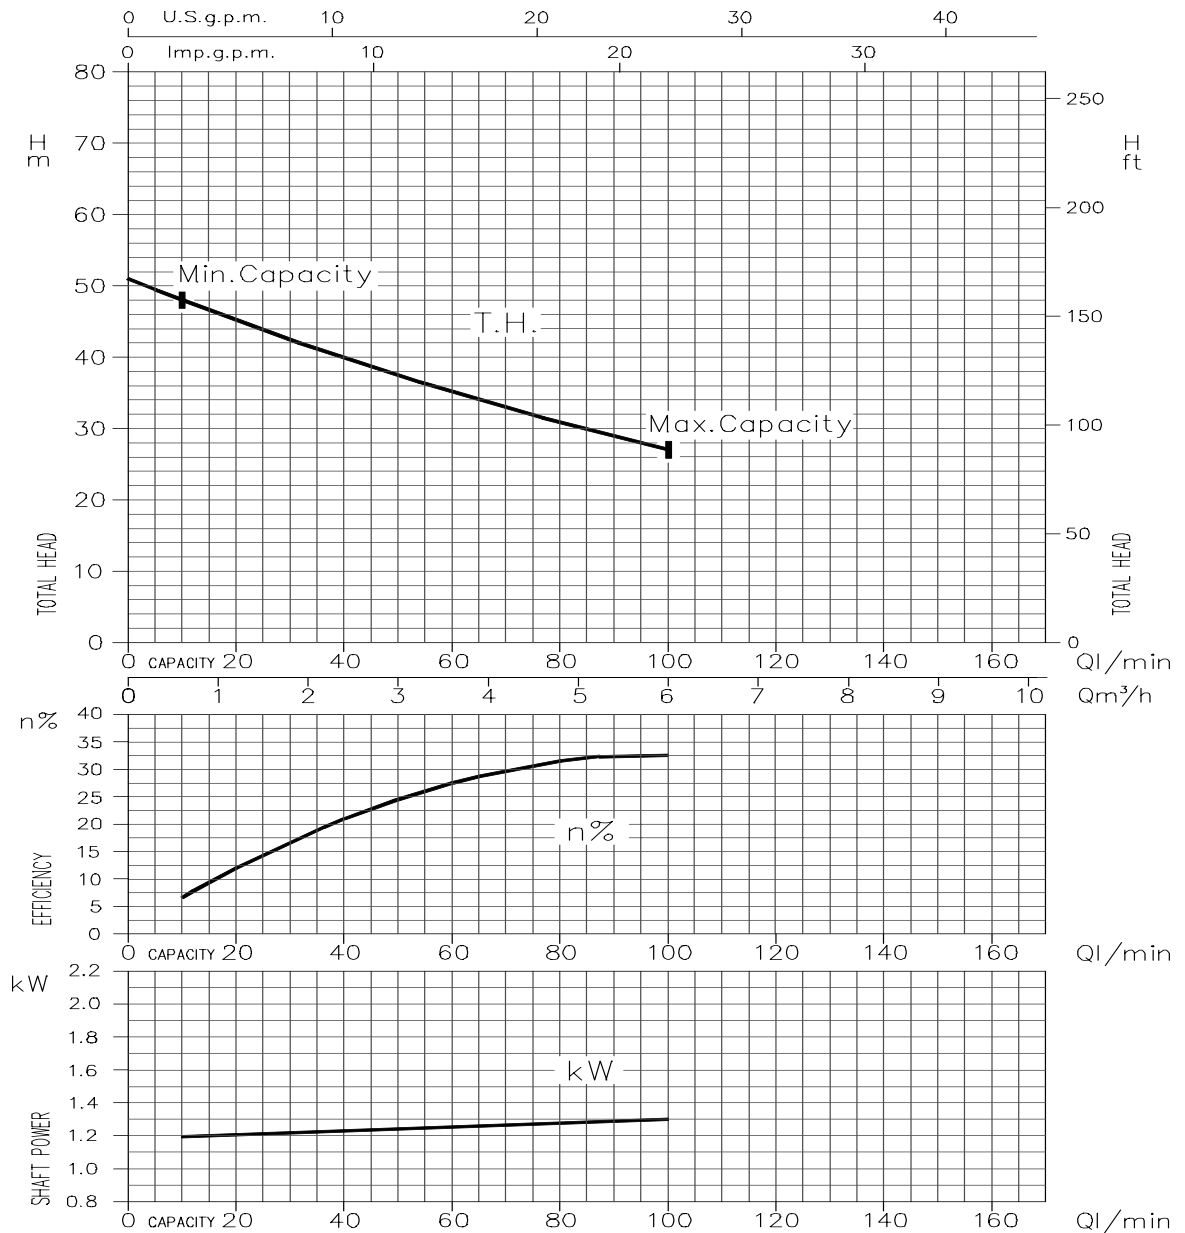

Temperature of water: 20°C
 Impeller diameter = 143 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGA 2.00 (1.5 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹

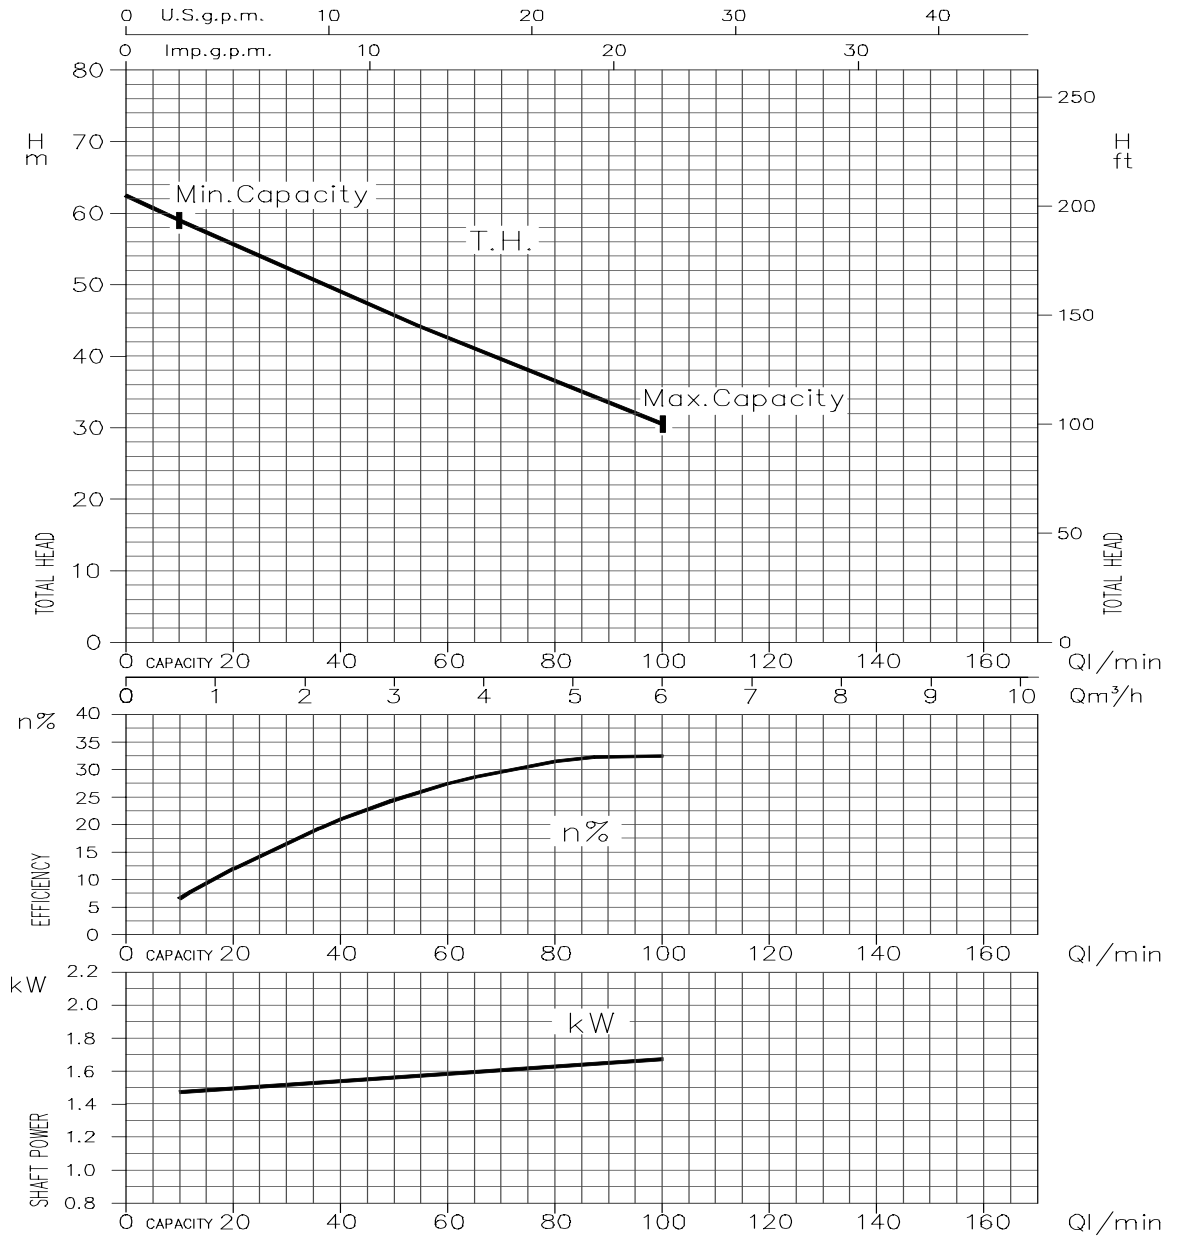

Temperature of water: 20°C
Impeller diameter = 157 mm
Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGA 3.00 (2.2 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹

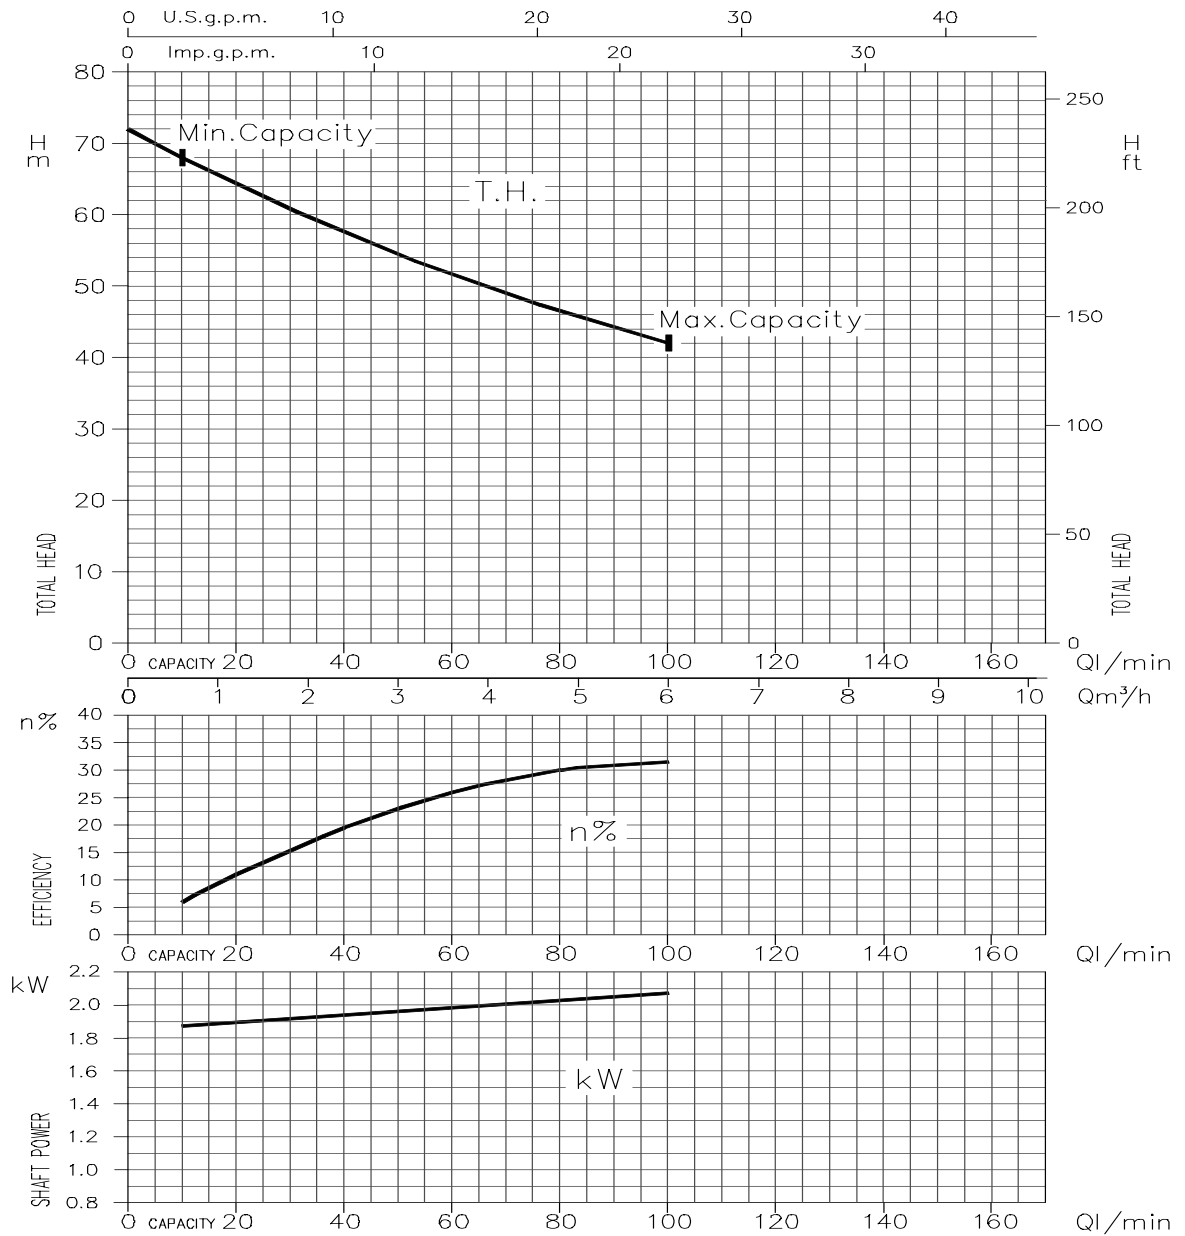

Temperature of water: 20°C
 Impeller diameter = 164 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGC 1.50 (1.1 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹

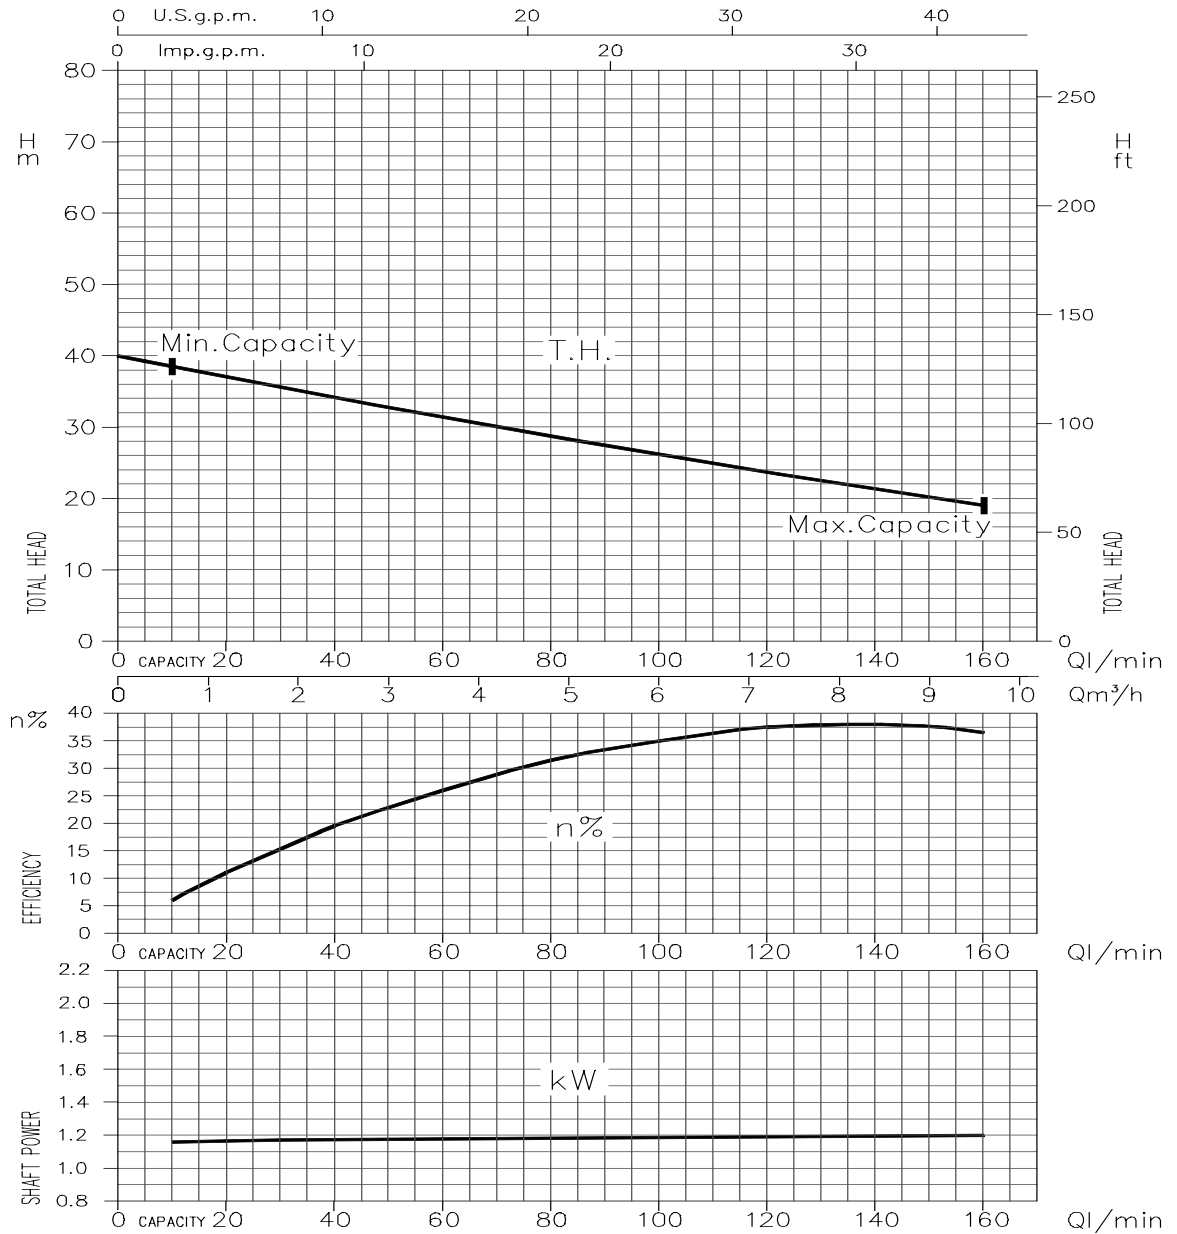

Temperature of water: 20°C
 Impeller diameter = 143 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

AGC 2.00 (1.5 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹

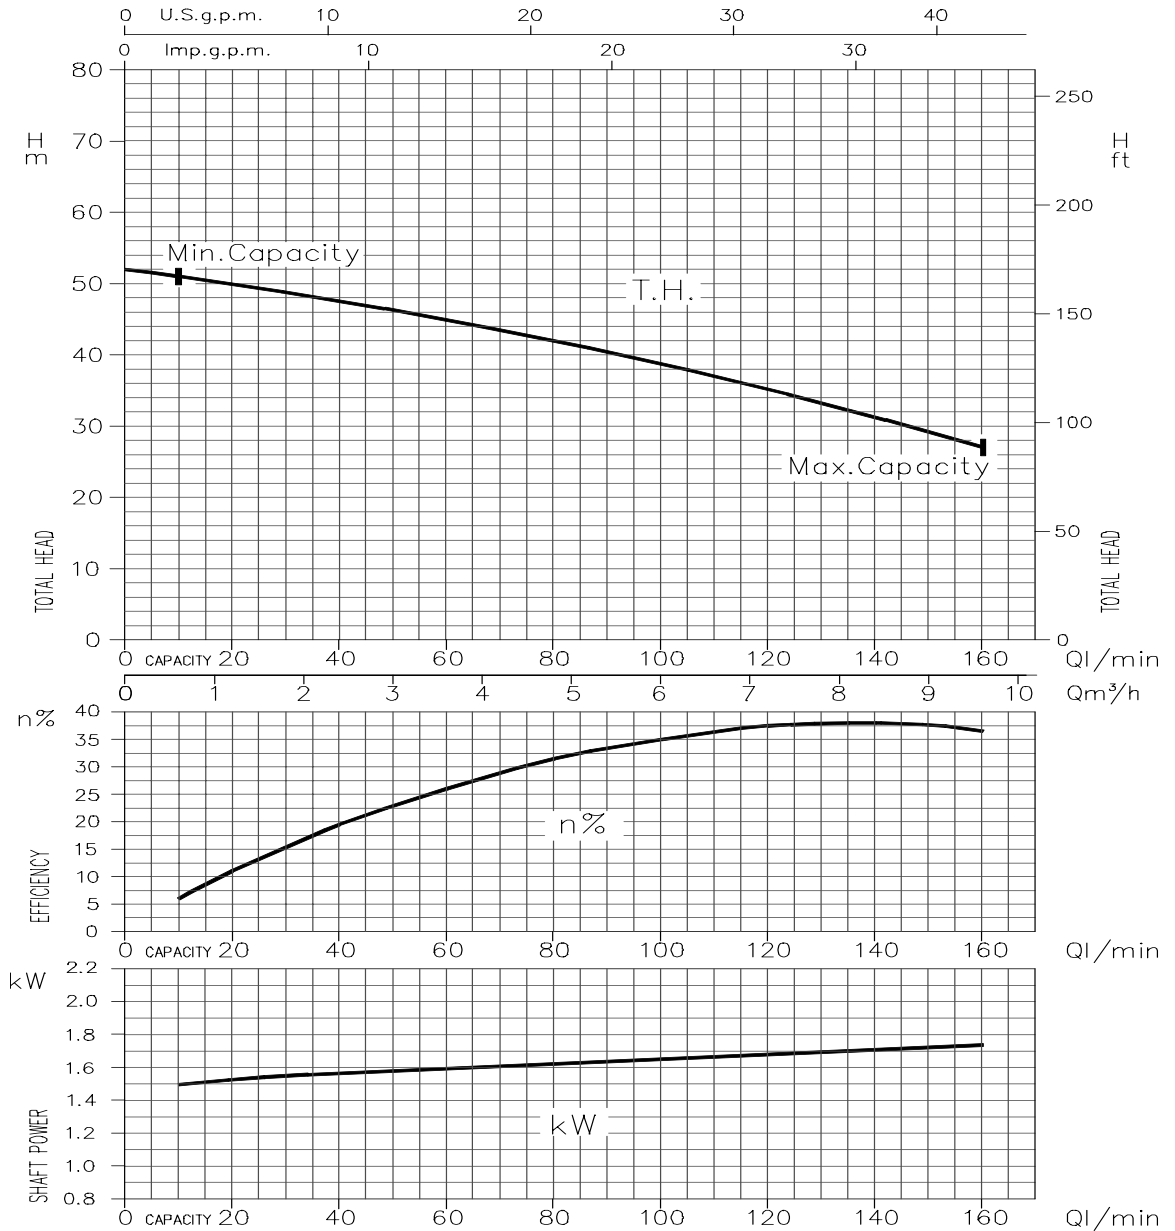

Temperature of water: 20°C
Impeller diameter = 157 mm
Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

PERFORMANCE CURVE

50Hz

**AGC 3.00 (2.2 kW)
SYNCHRONOUS SPEED : 3000 min⁻¹**

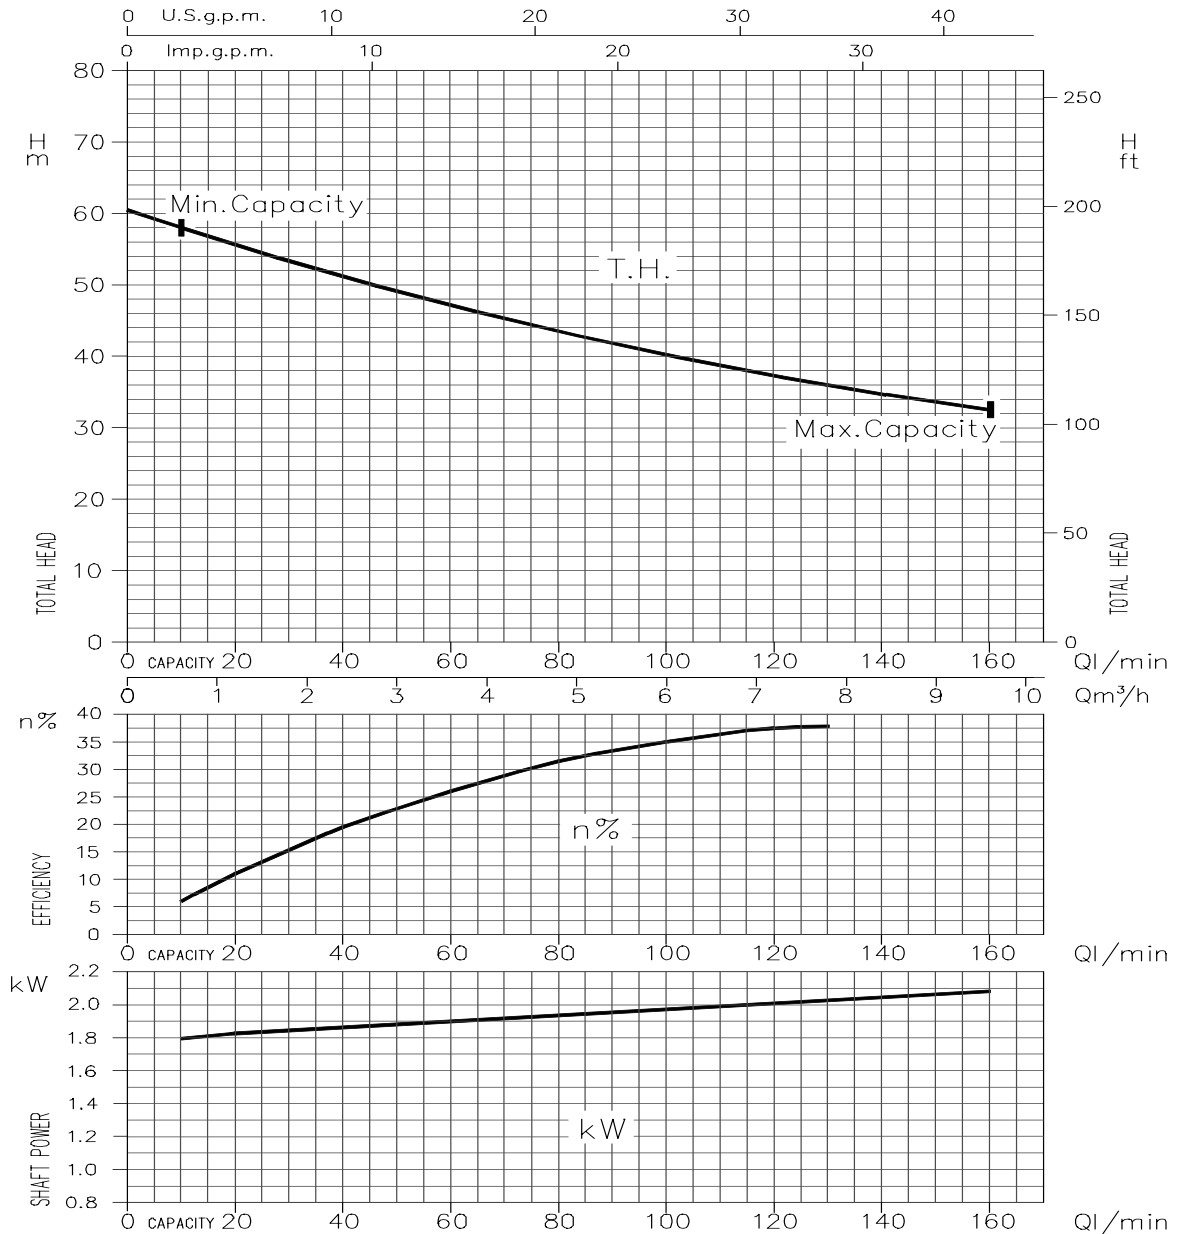

Temperature of water: 20°C
 Impeller diameter = 164 mm
 Applicable standard of test: ISO 9906 - Annex A


CENTRIFUGAL PUMPS

AGA-AGC

CONSTRUCTIONS

50Hz

SECTIONAL VIEW

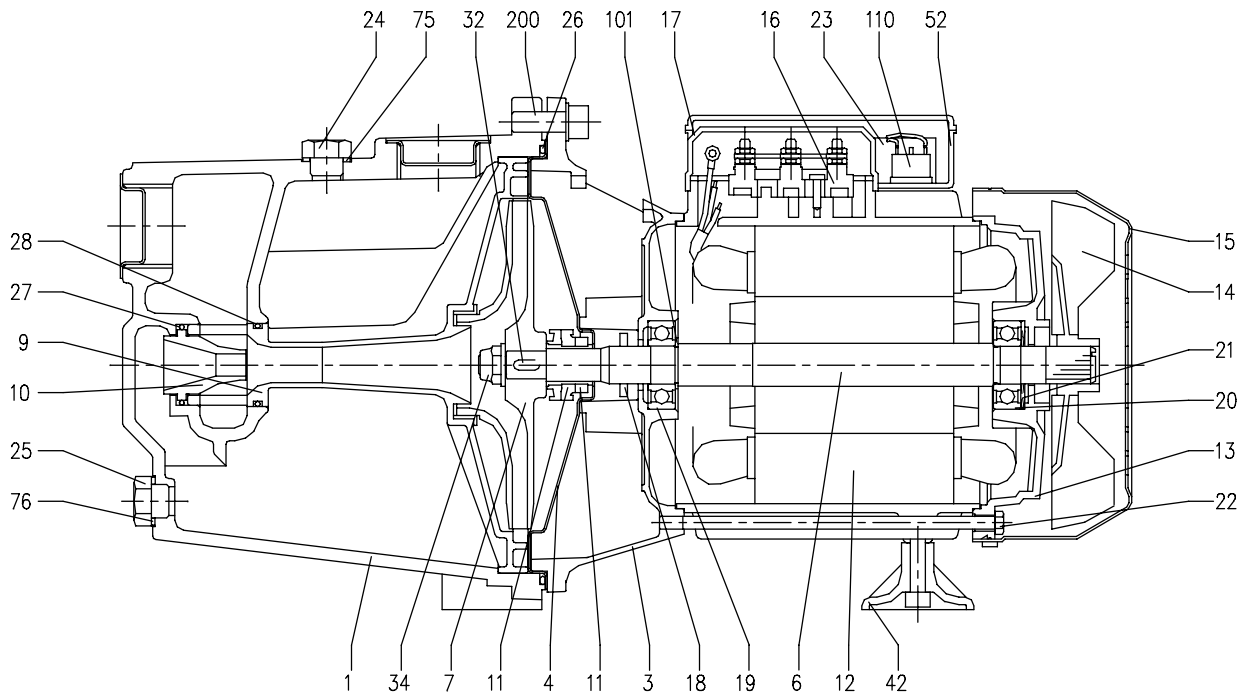

N°	PART NAME	MATERIAL	Q.TY	N°	PART NAME	MATERIAL	Q.TY
1	Casing	Cast iron	1	21	Adjusting ring	Steel C70	1
3	Motor bracket	[9]	1	22	Tie rod	Fe 42 Zinked	4
4	Casing cover	AISI 304 [8]	1	23	Capacitor [1]	-	1
6	Shaft with rotor	[6]	1	24	Priming plug	Brass	1
7	Impeller	[4]	1	25	Drain plug	Brass	1
9	Diffuser + Venturi tube	PPO mod. glass fibre reinforced	1	26	O-ring	NBR	1
10	Venturi nozzle	PPO mod. glass fibre reinforced	1	27	O-ring	NBR	1
11	Mechanical seal [7]	Carbon/Ceramic/NBR	1	28	O-ring	NBR	1
12	Motor frame with stator	-	1	32	Key	AISI 304	1
13	Motor cover	Aluminium	1	34	Impeller nut [3]	AISI 304	1
14	Fan	PA6	1	42	Foot	PVC	1
15	Fan cover	Fe P04 Zinked	1	52	Terminal box [1]	ABS	1
16	Terminal board	-	1	75	Washer	Aluminium	1
17	Terminal box cover [2]	Aluminium	1	76	Washer	Aluminium	1
18	Splash ring	NBR	1	101	Seeger ring	AISI 420	1
19	Pump side ball bearing	-	1	110	Motor protector [5]	-	1
20	Fan side ball bearing	-	1	200	Screw	Stainless steel A2 UNI7323	4

[1] Only for single phase

[2] Only for three phase

[3] Only for version with impeller in Brass

[4] Material : Noryl for type : AGA 0.60 - AGA 0.75 - AGA 1.00

Brass for type : AGA 1.50 - AGA 2.00 - AGA 3.00 - AGC 1.50 - AGC 2.00 - AGC 3.00

[5] Only for version single phase AGA 1.50 - AGA 2.00 - AGC 1.50 - AGC 2.00

[6] Material : AISI 420 for type : AGA 0.60 - AGA 0.75 - AGA 1.00

AISI 303 (part in contact with liquid) for type : AGA 1.50 - AGA 2.00 - AGA 3.00 - AGC 1.50 - AGC 2.00 - AGC 3.00


[7] See constructions mechanical seal page 301-302

[8] Only for version AGA 0.60 - AGA 0.75 - AGA 1.00

[9] Material : Cast iron for version AGA 1.50 - AGA 2.00 - AGA 3.00 - AGC 1.50 - AGC 2.00 - AGC 3.00

Aluminium for version AGA 0.60 - AGA 0.75 - AGA 1.00


MECHANICAL SEAL

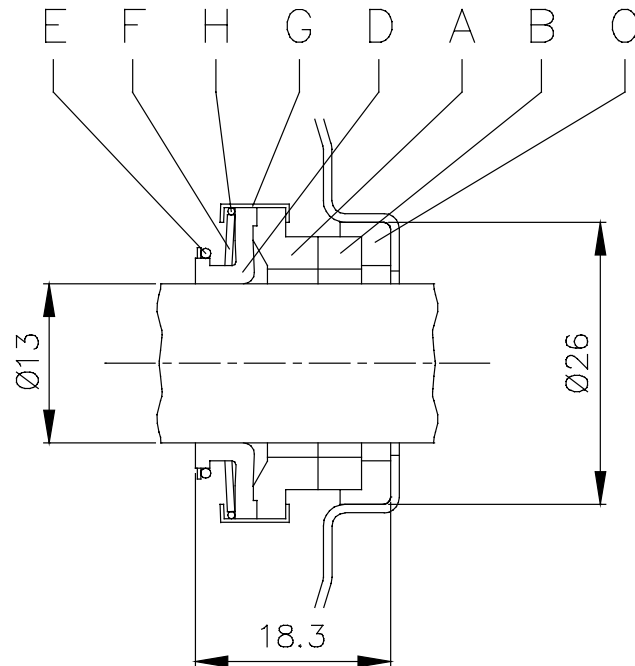

REF	PART NAME	MATERIAL product standard
		AGA-AGC
A	Rotary seal ring	carbon graphite
B	Stationary seal ring	ceramic
C	Gasket	NBR
D	Bellows	NBR
E	Ring	AISI 304
F	Self driving spring	AISI 304
G	Frame	AISI 304
H	Retainer ring	AISI 304

Version: AGA 0.60-AGA 0.75-AGA 1.00

MECHANICAL SEAL

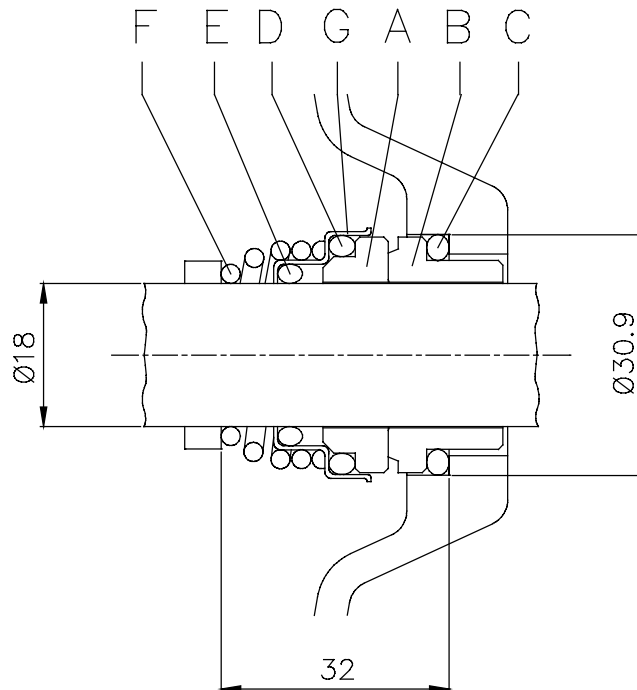


REF	PART NAME	MATERIAL product standard
		AGA-AGC
A	Rotary seal ring	ceramic
B	Stationary seal ring	carbon graphite
C	O Ring	NBR
D	O Ring	NBR
E	O Ring	NBR
F	Self driving spring	AISI 316
G	Frame	AISI 304

Version: AGA 1.50-AGA 2.00-AGA 3.00
AGC 1.50-AGC 2.00-AGC 3.00

DIAGRAM AND ELECTRIC CONNECTIONS


SINGLE PHASE MOTOR

FOR MOTORS WITH LOCKED ROTOR CURRENT UP TO 25 [A] (INTERNAL MOTORPROTECTOR)

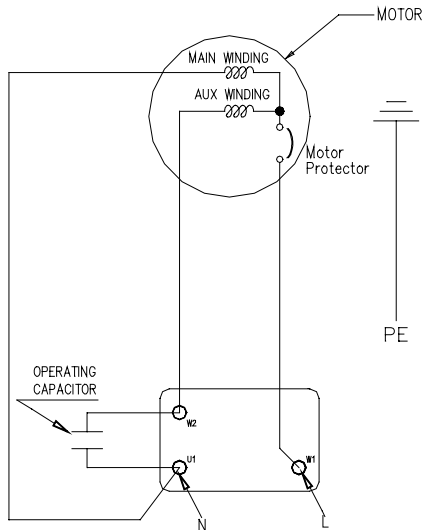

AGA 0.60 M
AGA 0.75 M
AGA 1.00 M

FOR MOTORS WITH LOCKED ROTOR CURRENT OVER 25 [A] (EXTERNAL MOTORPROTECTOR)

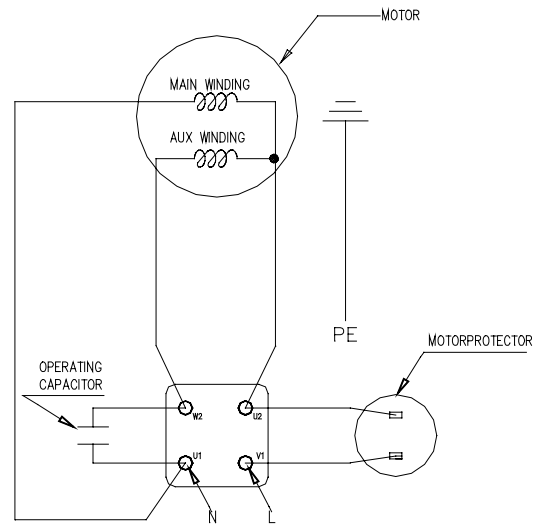


For model

AGA 1.50 M
AGA 2.00 M
AGC 1.50 M
AGC 2.00 M


DIAGRAM AND ELECTRIC CONNECTIONS

THREE PHASE MOTOR

STAR CONNECTION

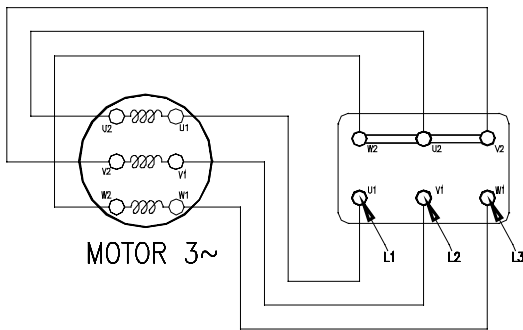


DELTA CONNECTION

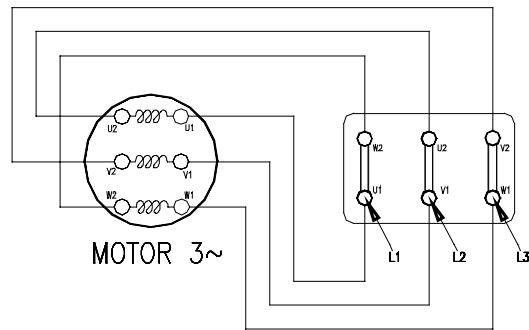


FOR MOTOR 4 kW AND BELOW

DELTA CONNECTION 230 V



STAR CONNECTION 400 V




CENTRIFUGAL PUMPS

AGA-AGC

DIMENSIONS

50Hz

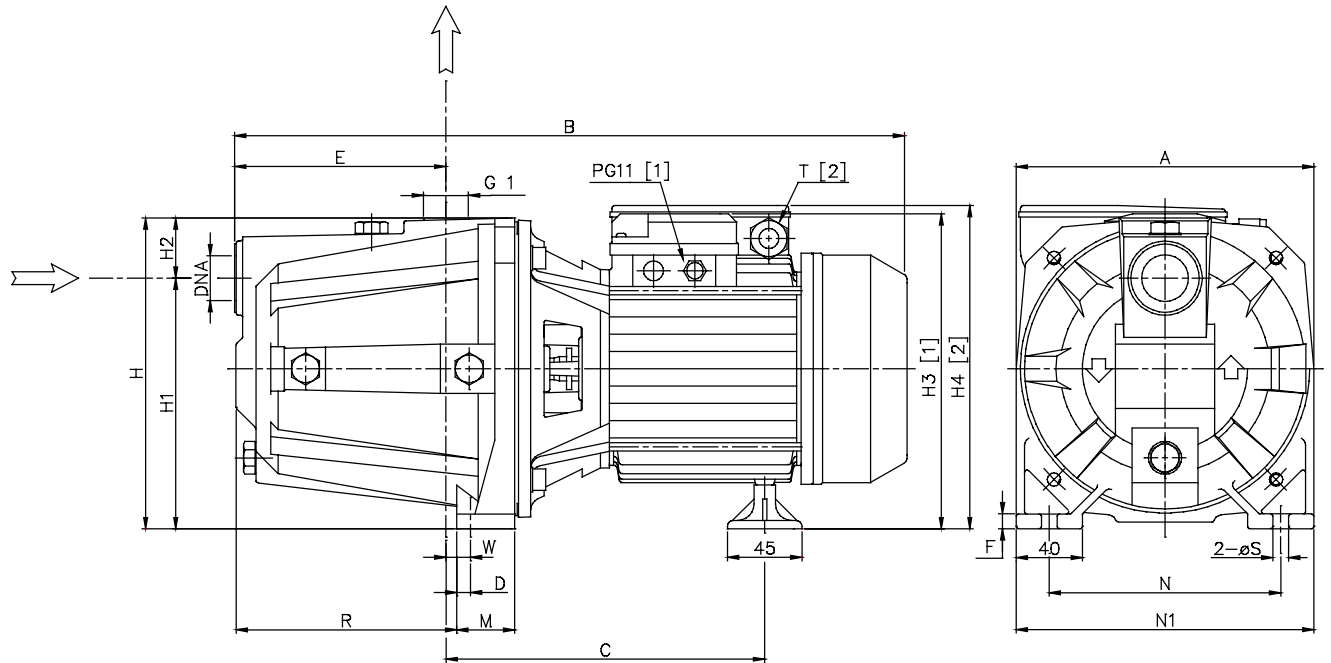

Pump type	Dimensions mm																		
	A	B	C	D	E	F	H	H1	H2	[1] H3	[2] H4	M	N	N1	R	[2] T	W	S	DNA
AGA 0.60 M	180	405	195	10.3	127	9	185	152	33	-	199	40	140	180	128.5	PG11	11.8	9.5	G 1
AGA 0.60 T	180	405	195	10.3	127	9	185	152	33	197.5	-	40	140	180	128.5	-	11.8	9.5	G 1
AGA 0.75 M	180	405	195	10.3	127	9	185	152	33	-	199	40	140	180	128.5	PG11	11.8	9.5	G 1
AGA 0.75 T	180	405	195	10.3	127	9	185	152	33	197.5	-	40	140	180	128.5	-	11.8	9.5	G 1
AGA 1.00 M	180	405	195	10.3	127	9	185	152	33	-	199	40	140	180	128.5	PG11	11.8	9.5	G 1
AGA 1.00 T	180	405	195	10.3	127	9	185	152	33	197.5	-	40	140	180	128.5	-	11.8	9.5	G 1
AGA 1.50 M	220	495	244	10	157	10	223	170	53	-	247	48	180	220	167.5	PG13.5	15.5	9	G 1 1/2
AGA 1.50 T	220	495	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2
AGA 2.00 M	220	508	244	10	157	10	223	170	53	-	247	48	180	220	167.5	PG13.5	15.5	9	G 1 1/2
AGA 2.00 T	220	495	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2
AGA 3.00 T	220	508	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2
AGC 1.50 M	220	495	244	10	157	10	223	170	53	-	247	48	180	220	167.5	PG13.5	15.5	9	G 1 1/2
AGC 1.50 T	220	495	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2
AGC 2.00 M	220	508	244	10	157	10	223	170	53	-	247	48	180	220	167.5	PG13.5	15.5	9	G 1 1/2
AGC 2.00 T	220	495	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2
AGC 3.00 T	220	508	244	10	157	10	223	170	53	229	-	48	180	220	167.5	-	15.5	9	G 1 1/2

[1] = Only for three phase


[2] = Only for single phase

CENTRIFUGAL PUMPS

AGA AGC

PACKING AND WEIGHT

50Hz

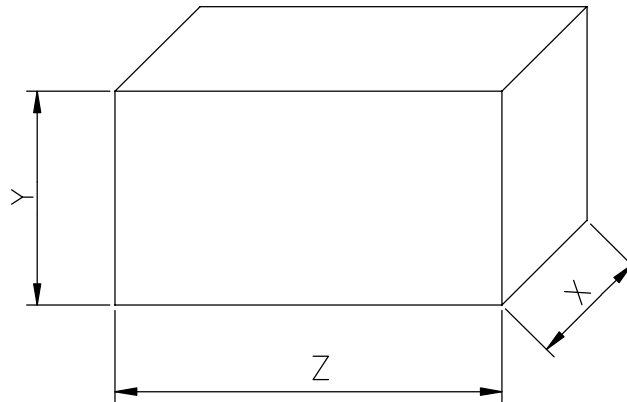

Type pumps		PACKING [mm]			WEIGHT [kg]	
Single Phase	Three Phase	X	Y	Z	Single Phase	Three Phase
AGA 0.60 M	AGA 0.60 T	420	230	235	12.5	12.5
AGA 0.75 M	AGA 0.75 T	420	230	235	13	13
AGA 1.00 M	AGA 1.00 T	420	230	235	14	14
AGA 1.50 M	AGA 1.50 T	520	265	270	26	26
AGA 2.00 M	AGA 2.00 T	520	265	270	27	27
-	AGA 3.00 T	520	265	270	-	27
AGC 1.50 M	AGC 1.50 T	520	265	270	26	26
AGC 2.00 M	AGC 2.00 T	520	265	270	27	27
-	AGC 3.00 T	520	265	270	-	27

CENTRIFUGAL PUMPS

AGA-AGC

TECHNICAL DATA

50Hz

Type pumps		kW	HP	Ball Bearing		Capacitor		Input in [kW]		Full load current in [A]		
Single Phase 230 V 50 Hz	Three Phase 230/400 V 50 Hz			Pump side	Fan side	μF	Vl	Single Phase	Three Phase	Single Phase	Three Phase 230 V 400 V	
AGA 0.60 M	AGA 0.60 T	0.45	0.6	6202 ZZ	6202 ZZ	12.5	450	0.7	0.65	3.1	2.1	1.2
AGA 0.75 M	AGA 0.75 T	0.55	0.75	6202 ZZ	6202 ZZ	14	450	0.92	0.84	4.0	2.8	1.6
AGA 1.00 M	AGA 1.00 T	0.75	1	6202 ZZ	6202 ZZ	20	450	1.15	1.02	5.5	3.6	2.1
AGA 1.50 M	AGA 1.50 T	1.1	1.5	6204 ZZ	6203 ZZ	35	450	1.65	1.60	8.1	5.3	3.0
AGA 2.00 M	AGA 2.00 T	1.5	2	6204 ZZ	6203 ZZ	40	450	2.1	2.05	9.8	6.3	3.6
-	AGA 3.00 T	2.2	3	6204 ZZ	6203 ZZ	-	-	-	2.5	-	7.9	4.7
AGC 1.50 M	AGC 1.50 T	1.1	1.5	6204 ZZ	6203 ZZ	35	450	1.8	1.75	8.6	5.8	3.3
AGC 2.00 M	AGC 2.00 T	1.5	2	6204 ZZ	6203 ZZ	40	450	2.30	2.25	10.5	6.8	3.9
-	AGC 3.00 T	2.2	3	6204 ZZ	6203 ZZ	-	-	-	2.60	-	7.9	4.6

Type pumps		Locked rotor current		
Single Phase 230 V 50 Hz	Three Phase 230/400 V 50 Hz	Single Phase 230 V 50 Hz	Three Phase	
			230 V 50 Hz	400 V 50 Hz
AGA 0.60 M	AGA 0.60 T	10.2	11.1	6.4
AGA 0.75 M	AGA 0.75 T	13.5	12.3	7.1
AGA 1.00 M	AGA 1.00 T	17.5	21.7	12.5
AGA 1.50 M	AGA 1.50 T	38	32.9	19
AGA 2.00 M	AGA 2.00 T	44	38.1	22
-	AGA 3.00 T	-	50.2	29
AGC 1.50 M	AGC 1.50 T	38	32.9	19
AGC 2.00 M	AGC 2.00 T	44	42.4	24.5
-	AGC 3.00 T	-	50.2	29

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com